



## PM DC Gearmotor, Type LYMC

For over 100 years, Merkle-Korff has been a leader in the design and manufacture of motors and gearmotors. Our advanced, custom engineered solutions have contributed to the success of countless commercial, industrial, and consumer products.

The Type C spur gearbox is available with a full range of reliable, long-life PMDC motors. All models offer custom windings, gear ratios, and output shafts.



### Features

- Die cast zinc gearbox
- Plastic, powdered metal, or cut steel gears
- Skewed armature for low cogging
- Dynamically balanced
- Extended life brushes with constant force springs
- Low audible noise
- Excellent speed regulation

### Specifications

- 10-25 watts output
- 6-36 V DC
- Up to 30 in-lbs cont. torque
- Gear reduction up to 1262 to 1

### Optional features

- Custom output shafts
- Helical first stage gears for low noise
- EMI/RFI filters
- Custom wire harness
- Hall-effect or optical encoders
- Ball bearings or needle bearings

### Applications

- Medical equipment
- Agricultural equipment
- Construction
- Document handling equipment
- Industrial controls/valves
- Robotics
- Vending machines




**Merkle-Korff Industries®**

A Kinetek Company®

Merkle-Korff Industries  
25 NorthWest Point Blvd., Suite 900  
Elk Grove Village, IL 60007  
Phone: (847) 439-3760  
Fax: (847) 439-3963  
Email: sales@merkle-korff.com  
Web: www.merkle-korff.com

**Dimensional diagram**

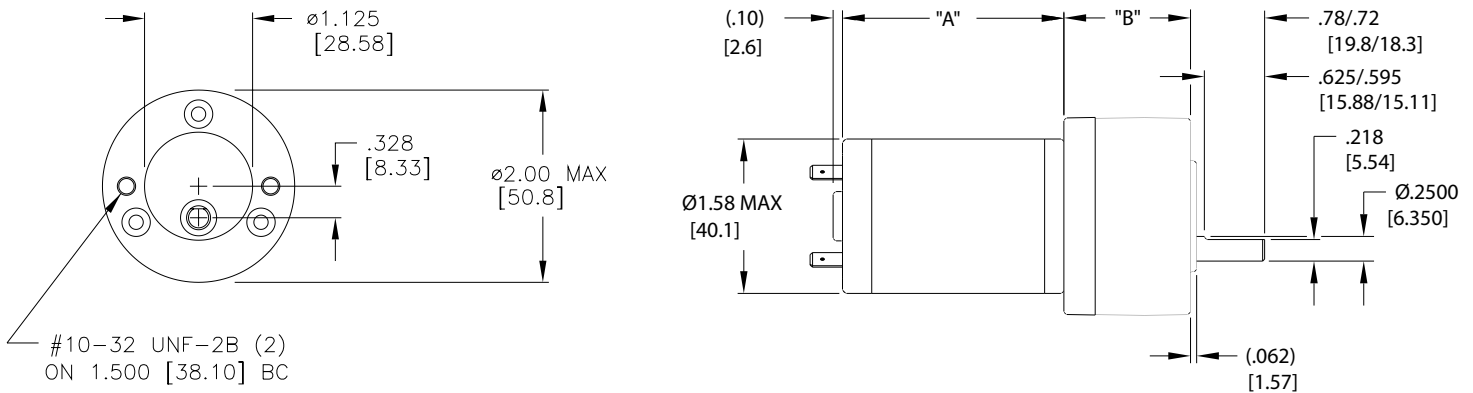

**Type C Gearmotor - Performance Data - 12 Volts**

Motor no.	Max Overall Length	No Load		Rated Full Load					
		Speed (RMP)	Current (Amps)	Speed (RPM)	Torque (oz-in)	Torque (lb-in)	Current (Amps)	Po (mHp)	Po (Watts)
LYMC-62700-621	3.23	497	0.25	431	29.8	1.9	1.4	12.7	9.5
LYMC-62700-630	3.39	257	0.27	223	51.8	3.2	1.4	11.4	8.5
LYMC-62700-631	3.39	148	0.27	129	89.5	5.6	1.4	11.4	8.5
LYMC-62700-640	3.55	77.0	0.30	66.8	156	9.7	1.4	10.3	7.7
LYMC-62700-641	3.72	44.4	0.30	38.5	270	16.9	1.4	10.3	7.7
LYMC-62700-651	3.88	13.3	0.34	12.2	480	30.0	0.98	5.8	4.3
LYMC-62700-661	4.04	4.0	0.37	3.9	480	30.0	0.58	1.8	1.4

**Type C Gearmotor - Performance Data - 24 Volts**

Motor no.	Max Overall Length	No Load		Rated Full Load					
		Speed (RMP)	Current (Amps)	Speed (RPM)	Torque (oz-in)	Torque (lb-in)	Current (Amps)	Po (mHp)	Po (Watts)
LYMC-63000-721	3.23	516	0.12	438	32.3	2.0	0.80	14.0	10.5
LYMC-63000-730	3.39	267	0.14	226	56.1	3.5	0.80	12.6	9.4
LYMC-63000-731	3.39	154	0.14	131	97.0	6.1	0.80	12.6	9.4
LYMC-63000-740	3.55	80.0	0.15	67.8	169	10.5	0.80	11.3	8.5
LYMC-63000-741	3.72	46.1	0.15	39.1	292	18.3	0.80	11.3	8.5
LYMC-63000-751	3.88	13.8	0.17	12.6	480	30.0	0.52	6.0	4.5
LYMC-63000-761	4.04	4.1	0.19	4.0	480	30.0	0.30	1.9	1.4

